


Fiber Optic Splice Closure - Inline -

Specially designed for specific FTTx network environment and developed for multi-branch and multi-purpose and which is suitable for 8-branching or multi-branching installation by using multi-branching gaskets in case of FTTx network installation. Besides, it provides with easy and reliable installation and high mechanical strength against any environmental conditions.

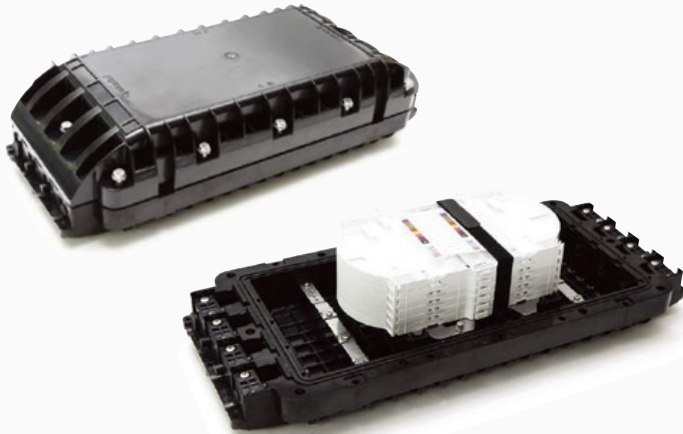

YX-CLI-4000-T6-144C

- The ribbed body has high mechanical strength against impact and compression
- Capability of multi-core management
- 100% water-proof by using silicone gasket
- Mechanically assembled by Bolt
- Available for various cable diameter, multi branching and various installation environments. (Aerial, Duct, Manhole)

Model	YX-CLI-4000-T6-	
Size (mm)	559 X 242 X 135	
Weight (kg)	4.5 kg	
Cable ports (Entry / Exit)	8 (4/4)	
Cable dia. (mm) (Main / Drop)	Ø8 ~ Ø24 / Ø3.5 ~ Ø8	
No. of splice tray	6	
Tray Capacity (Single / Double)	24C / 48C	
Splicing Capacity (Single / Double)	144C / 288C	
Splice protector	Heat shrinkable sleeve, Mechanical splice	
Tension member	Galvanized steel wire, FRP, Wire	
IP Grade	IP 68	