






Independence Series Standard Offerings

- 


.125 Aircraft Grade Aluminum: Outstanding corrosion resistance.
- 


NEMA Protection: This enclosure protects against rain, sleet, snow, splashing water and damage from external ice formation.
- 


Stainless Steel Hardware: We choose the highest quality materials to produce our enclosures. Type 304 stainless steel hardware will not rust in the field.
- 


GR487 Powder Coat: Enclosures are powder coated and tested to the Telcordia GR487 specifications for telecom enclosures.
- 

Power: A pre-wired 20 Amp quad receptacle is a standard feature.
- " icon" data-bbox="71 525 115 560"/>

Numbered Adjustable Equipment Racks: 19" or 23"
- 

Solar Shield Roof: Includes a double wall roof to reduce the radiant heat and internal cooling requirements of the enclosure.
- 

Ground Terminal Strip: 18 position aluminum strip
- 

Locking: Extremely secure, strong and impermeable. Lockable handles and hinges are made from Type 304 stainless steel.
- 

Lifting Eyes: Crane ready lifting eyes for a convenient way to offload and position your enclosure.



Standard Color / finish choices:
Colors shown here are approximate.




Expandability: Remove side-mount adapter plates to add accessories or joining collars without sacrificing interior space. Cabinets may be expanded to meet your project requirements.



Independence Series Options



Load Center



Upgraded Copper Ground Bar



Additional Set of Rails



Laptop Tray



Generator Plug & Interlock



LED Interior Lighting



Battery Compartment



L Rail Set



Door Alarm



Battery Tray



Insulation Recommended for climate control options



Mounting Plinth 4" or 6"

Independence Series Climate Control Options

AC 1,000 to 12,000 BTU/hr*



- Built-in Heater
- Corrosion Protection
- Cold Start Heater



Exhaust Fan

- 115VAC / 12, 24, 48VDC
- Adjustable Thermostat
- Filters



Heat Exchanger

- Consult factory for sizes.



AC 1,000 to 6,000 BTU/hr

- 48 VDC Powered



Heater

- Built in adjustable thermostat
- 100W-1000W 115VAC




Battery Heater Pad

- 115VAC
- Fits on Battery Tray

*Built in adjustable thermostat. Closed-loop system, 115/230 VAC

Basic Layout

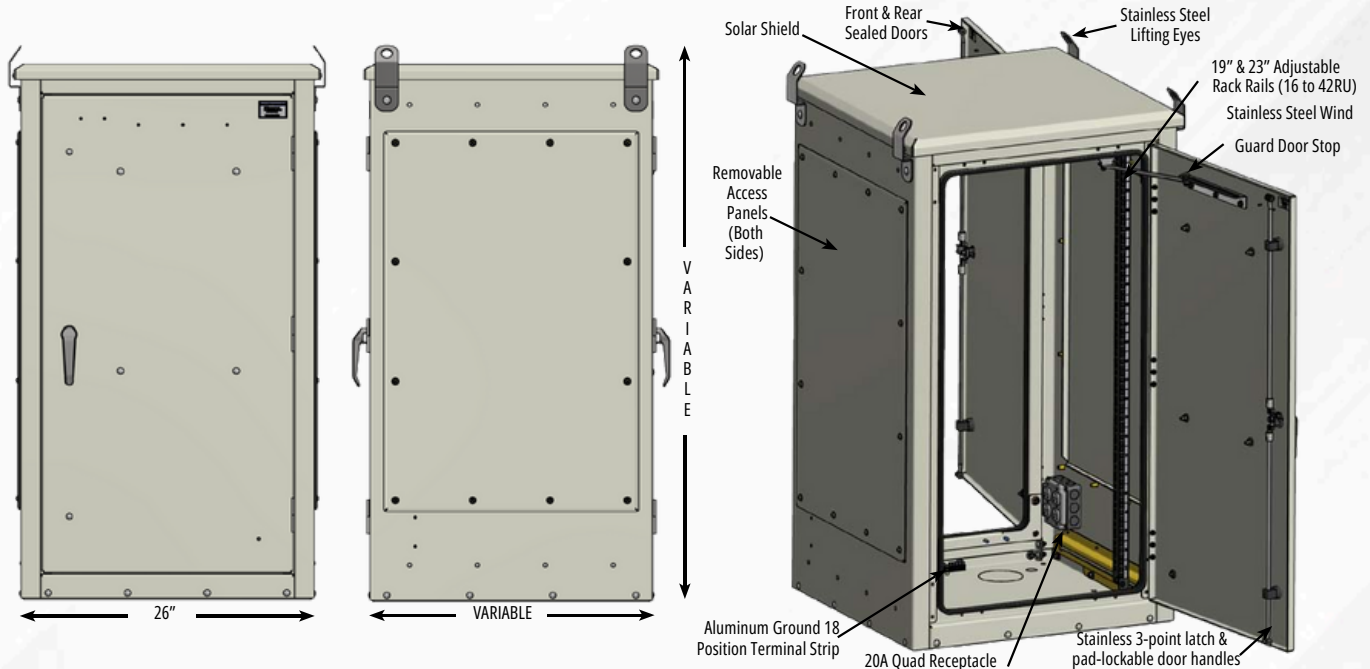

How to Order

RUs	HEIGHT	WIDTH	DEPTH	QUAD REP	RACK RAILS
16	32"	26"	25" or 30" or 36"	20 AMP	19" or 23"
24	47"	26"	25" or 30" or 36"	20 AMP	19" or 23"
30	58"	26"	25" or 30" or 36"	20 AMP	19" or 23"
36	68"	26"	25" or 30" or 36"	20 AMP	19" or 23"
42	78"	26"	25" or 30" or 36"	20 AMP	19" or 23"

Try the Online Configurator to Design Your Own!