


P/N: ENC-0323-0438-XXX-XXX-XXXM

Side A Conn.
LCU=LCUPC
SCA=SCAPC

Length

Side B Conn.
LCU=LCUPC
SCA=SCAPC

REVISIONS			
REV.	DESCRIPTION	DATE	REVISED
1.0	DRAWING ISSUED	2023.3.16	ENG.DEPT.

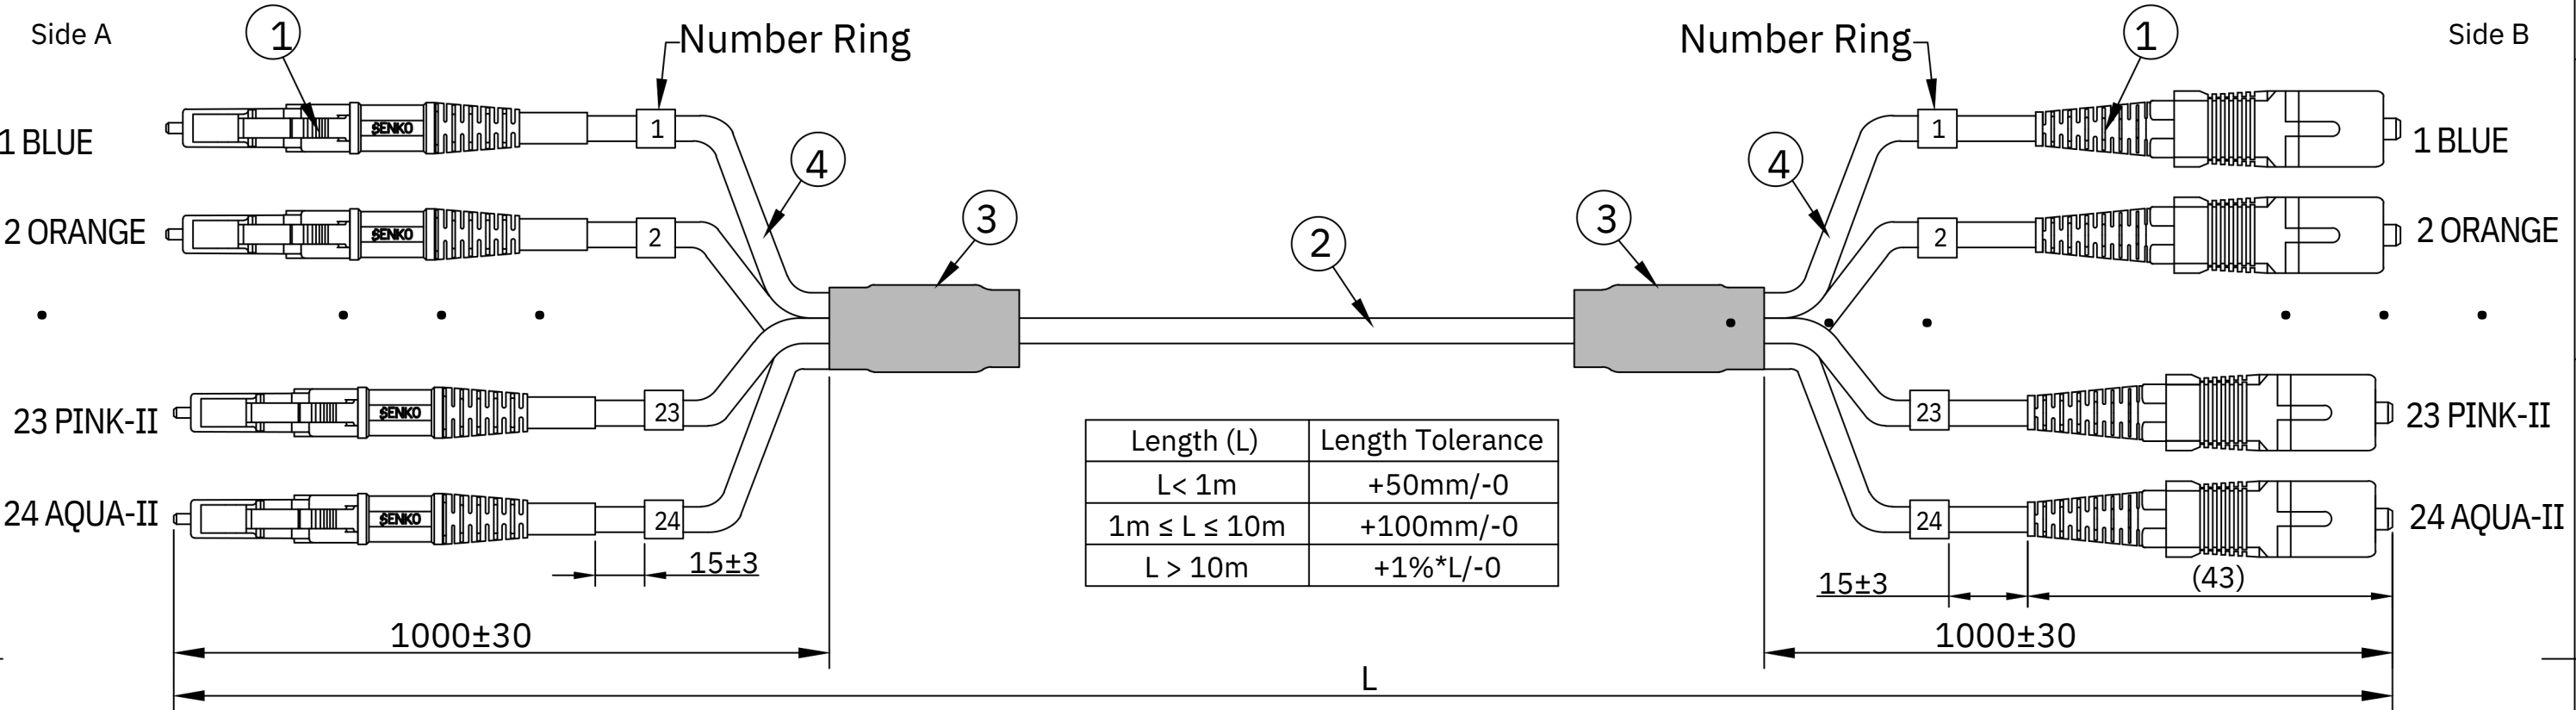


Endface Geometry:		
Specification type	SC/APC	LC/UPC
Radius of curvature (mm)	5~12	7~25
Fiber height (nm)	-100~+100	-50~+50
Apex offset (um)	≤50	≤50
Angle(°)	7.7~8.3	/

Optical Performance:		
Item	Single Mode	
Connector type	LC/UPC	SC/APC
Insertion Loss	≤0.3dB	≤0.3dB
Return Loss	≥55dB	≥65dB
Test Wavelength	1310nm&1550nm	



www.mayacr.net/ Contactos: (+506) 7121-3349/ 2244-3840/ info@mayacr.net

- Notes:
- 1.Connector endface appearance inspection standard;
 - 2.3D Geometry/Interferometer inspection standard;
 - 3.All connectors should have protective dust caps.
 - 4.Max. difference between same side connectors may not exceed 30mm.
 - 5.Packing spec:
Each product to be individually packed in a Plastic bag;
One serial number with IL RL test result label in the bag;
 - 6.This product complies with ROHS;

CONFIDENTIAL		1-2		LC/UPC SM Connector Kit, Blue housing and 3.0mm Mini white boot	24			
		1-2		SC/APC SM Connector Kit, Green housing and 3.0mm Mini Green boot	24			
		Item No.	Part Number	Description	Qty.			
Category	UNLESS OTHERWISE SPECIFIED: DEBURRS ALL SHARP EDGES, DIMENSIONS ARE AFTER FINISH TOLERANCES: 0 - 5 mm = 5 - 30 mm = 30 - 120 mm = 120 - 300 mm = <=	Drawn By ENG.DEPT.		Checked By Joy Sun	All Dimensions in mm		Date 2023.3.16	
					Material:			
M					Name: LCUPC or SCAPC - LCUPC or SCAPC 3mm G657A2 24F Yellow Riser Round FO 3mm Jumper			
					P/N:	Scale	Rev.	Sheet
					Dwg.No: ENC-0323-0438	Free	1.0	1/1